






PACIFIC MARINE & INDUSTRIAL

MANUFACTURING ♦ DISTRIBUTION ♦ SERVICE

CONTAINER HANDLING

PRODUCT CATALOG

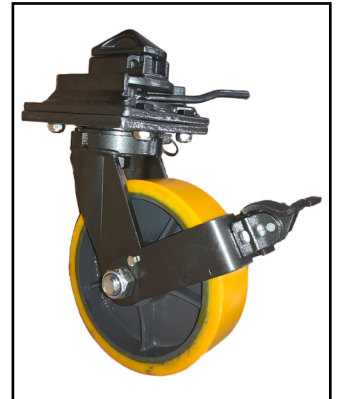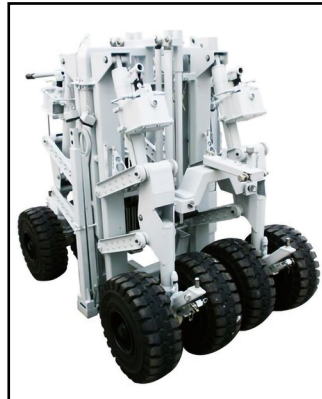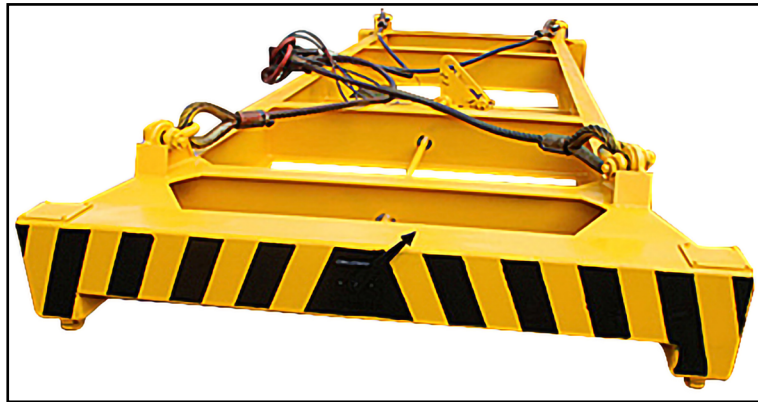

Spreader Frames
Spreader Bars
Container Casters
Dolly System
Towing System



Quality Pacific Manufacturing, Inc.,


P.O. Box 70520 Richmond, CA USA 94807

510-233-2310

www.pacificmarine.net

info@pacificmarine.net

Copyright © Quality Pacific Manufacturing, Inc.

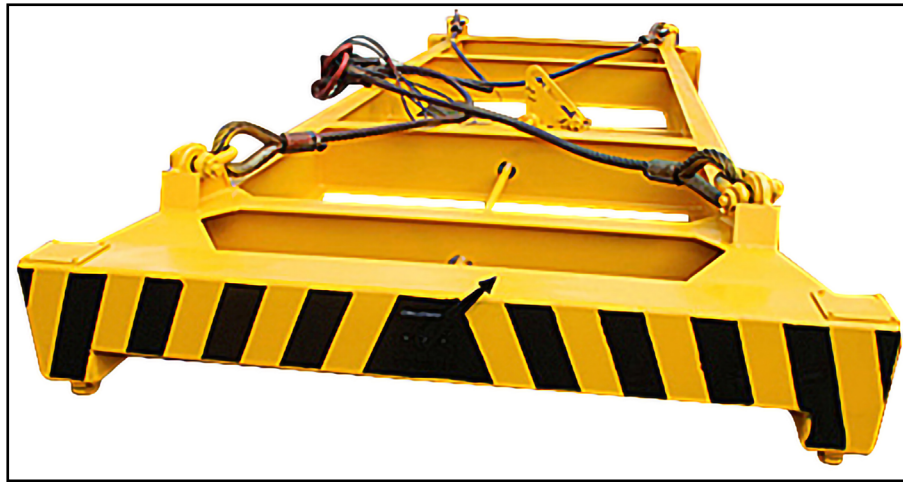

Standard Container Spreaders Are Supplied With:

- Automatic Function (No Ground or Riding Personnel) Only The Crane Operator Includes Bull Ring And All Associated Wire Slings**
- Safety Yellow Paint**
- Side Marked With WLL**
- Container Guides (Assist in Lowering To Container Top)**

Class Approval On Request

Options And Modifications Available:

- Increase In Safe Working Load**
- Forklift Pockets**
- Wire Stowage Bollards**
- Workman Walkways**
- Container Balance Mechanism**
- Units For Double Crane Hook**

Item	20 Foot Spreader	40 Foot Spreader
SWL	32 Tons	36 Tons
Max. Capacity	40 Tons	45 Tons
Dead Weight	2.2 Tons	3.2 Tons
** Higher capacity spreaders are available.		

Overall Dimensions:		
Item	20 Foot Spreader	40 Foot Spreader
Distance Between Lock Centers (Length)	≈ 5853 mm	≈ 11985 mm
Distance Between Lock Centers (Width)	≈ 2260 mm	≈ 2260 mm
Overall Length	≈ 6054 mm	≈ 12186 mm
Overall Width	≈ 2610 mm	≈ 2610 mm
Frame Height	≈ 680 mm	≈ 700 mm





Auto Open and Locked Indicator




Automatic Operation Mechanism



Name Plate with Serial Number



SWL Side Mark

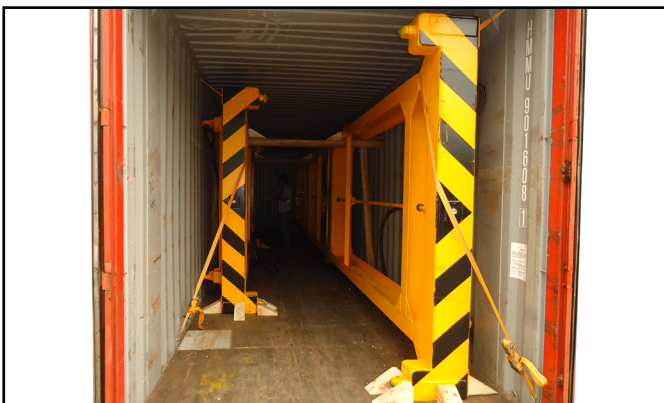


In Container Ready for Shipment



PM&I Side Mark



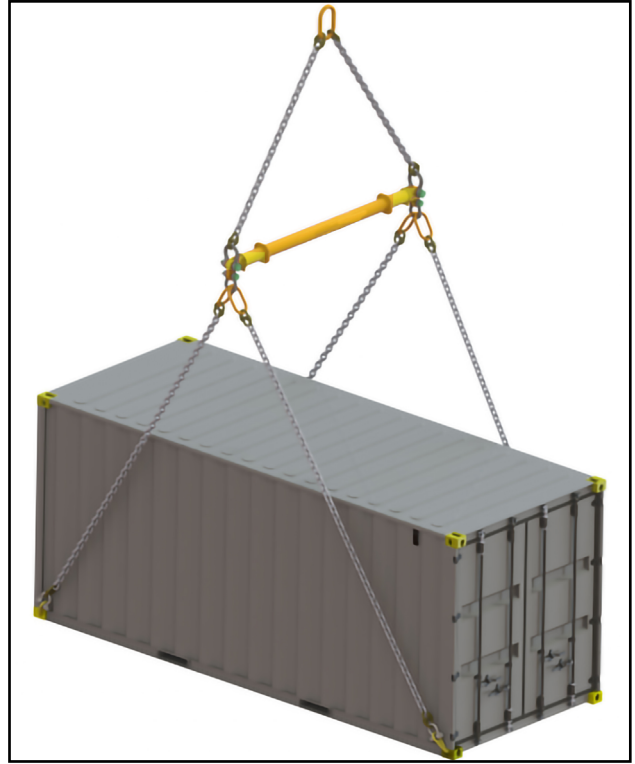

Made Per Project Requirements

Safe Working Load As Needed

Stamped and Certified

Length as Needed

Chain, Wire Rope or Straps

Multi Lifting Positions

Multi Lifting Attachment Types





PACIFIC MARINE & INDUSTRIAL

510-233-2310

www.pacificmarine.net

info@pacificmarine.net

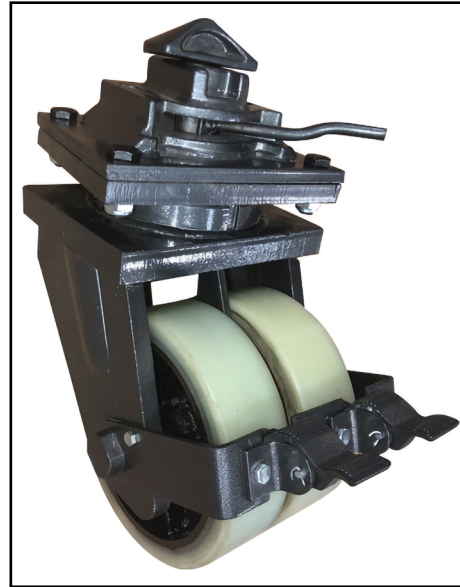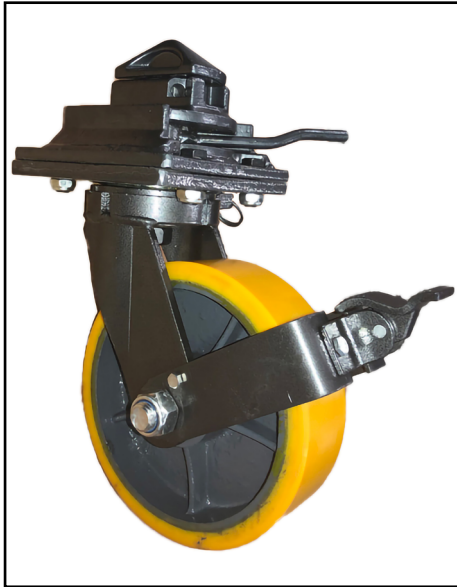

Stock Casters Include:
 Swivel
 Swivel Lock
 Brakes
 Twistlock for ISO Container

**If Shipping Container and Cargo Is Under 30 Tons,
 Casters Will Be Configured with Twistlock As Shown Above.**

Shipping Containers Over 30 Tons Will Need Different Securing Configuration.

Caster Wheels Can Be Made According To Your Requirements.

Stock Caster Wheels					
Model	Caster Diameter	Capacity Each	Container Gross	Color	Weight Each
SW-08-2TON	8" [200mm]	4,400 Lbs (2,000 kgs)	17, 600 Lbs. (8,000 kgs)	HUB: Silver Wheel: Yellow	55 lbs.
SW-10-3TON	10" [250mm]	6,600 Lbs. (3,000 kgs)	26,400 lbs. (12,000 kgs)	HUB: Silver Wheel: Yellow	72 lbs.
DW-10-5TON	10" [250mm]	11,000 lbs [5,000 kgs]	44,000 lbs. (20,000 kgs)	HUB: Silver Wheel: Yellow	157 lbs
DW-10-8TON	10" [250mm]	17,600 lbs. (8,000 kgs)	70,400 lbs (16,000 kgs)	HUB: Silver Wheel: Yellow	168 lbs



PACIFIC MARINE & INDUSTRIAL



510-233-2310



www.pacificmarine.net



info@pacificmarine.net



Stock Casters Include:
 Swivel
 Swivel Lock
 Brakes
 Twistlock for ISO Container

**If Shipping Container and Cargo Is Under 30 Tons,
 Casters Will Be Configured with Twistlock As Shown Above.**

Shipping Containers Over 30 Tons Will Need Different Securing Configuration.

Caster Wheels Can Be Made According To Your Requirements.

Stock Caster Wheels		
Model	Caster Diameter	Capacity Each
DW-R-16-1.25TON	412mm / 16.2 Inch Diameter	5 Ton Per Set of 4
DW-R-21-2.5TON	541mm / 21.3 Inch Diameter	10 Ton Per Set of 4



PACIFIC MARINE & INDUSTRIAL



510-233-2310



www.pacificmarine.net



info@pacificmarine.net



**Hydraulic Self Lifting
Container Dolly**



**Manual
Container Dolly**

ISO Shipping Container Dolly Systems

**Mobilize Loaded or Unloaded Shipping Containers
Fits ISO Corner Castings for Shipping Containers
Standard Capacity is 10, 25 or 30 Tons**

Container Casters Are Selected For Your Required Load Capacity and Application Environment

Move Handle Forward to Lock or Backward to Unlock

Swivel Lock and Caster Brakes Are Available

Includes Tow Bar For Transport By Vehicle Or By Hand

Double Or Triple Container Casters Are Available Per Application Requirement

Lift Design Can Make Attaching Casters To Container A One Person Process

Heavy Duty Casters Can Be Provided For Use In Sand, Gravel, Mud and Brush If Needed



PACIFIC MARINE & INDUSTRIAL

 **510-233-2310**

 **www.pacificmarine.net**

 **info@pacificmarine.net**



ISO Shipping Container Towing Bar

Tow Bar Folds Compactly For Storage and Transport

Standard Capacity is 5, 10, 25 or 30 Tons

Twistlock Connector Ends Quickly Secure To The Bottom End of ISO 1161 Corner Castings

Twistlock Connector Ends Allow 20° Rotation For Height Difference Between Container and Towing Vehicle



PACIFIC MARINE & INDUSTRIAL

 510-233-2310

 www.pacificmarine.net

 info@pacificmarine.net